



LASER TEK TAIWAN CO., LTD
雷科股份有限公司



LED Panel Light: PNH1-040 / PNH2-050



Features & Benefits:

- Excellent power saving performance with high brightness efficiency LED
- Energy saving up to 45%
- Steady light with no flickering for eye protection
- No starting problem in freezing temperature
- Wide range of dimension available, customize dimension available on request
- Uniform diffused, reduce glare

Application

Direct illumination source for general use: commercial, office, advertisement display board

Light Up Your Life




LASER TEK TAIWAN CO., LTD
雷科股份有限公司




Specification

Item #	PHA-040	PHB-050
Diffusion	T-Bar	Uniform
Color Temp	6000 ± 250K ; 4000 ± 250K ; 3000 ± 250K	
Dimension	595*595	595*595
Wattage	≤38W	≤48W
Light fixture(lm)	≥2850	≥3080
CRI	300k ≥ 75, 4000k,6000k ≥ 70	
Input voltage	AC 100V ~ 277V , 50/60Hz	
Power factor	≥0.90	
Lm/W	≥88%	
illuminance (1 Meter)	1140lux	930lux
Beam angle	120	150
operation temp	-25°C ~ 40°C	

Polar graph

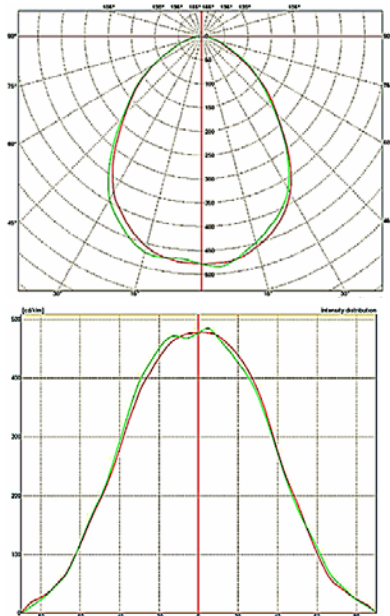

illuminance

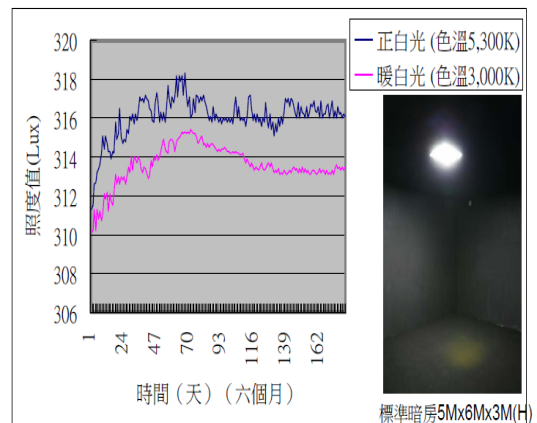

LASER TEK Taiwan CO. LTD. Head Office, Taiwan, R. O. C
NO. 248-39, Xinsheng Rd., Qianzhen Dist.
Kaohsiung City 806, Taiwan(R. O. C)
TEL : 886-7-8159877 · FAX : 886-7-8156711
E-Mail : led@lasertek.com.tw

Light Up Your Life